


※中にはメーカーが限られる商品もあります

## SUS304 ピン角コールドアングル (冷間圧延品)

単位 : mm

| サイズ     |   |        |   | 304    |         |         |
|---------|---|--------|---|--------|---------|---------|
| 肉厚<br>t | × | 辺<br>A | × | 辺<br>B | 4,000mm | 6,000mm |
| 3       | × | 20     | × | 20     | ●       |         |
| 3       | × | 25     | × | 25     | ●       |         |
| 3       | × | 30     | × | 30     | ●       | ●       |
| 3       | × | 40     | × | 40     | ●       | ●       |
| 3       | × | 50     | × | 50     | ●       | ●       |
| 4       | × | 40     | × | 40     |         | ●       |
| 4       | × | 50     | × | 50     |         | ●       |
| 5       | × | 30     | × | 30     |         | ●       |
| 5       | × | 40     | × | 40     |         | ●       |
| 5       | × | 50     | × | 50     |         | ●       |
| 6       | × | 30     | × | 30     |         | ●       |
| 6       | × | 40     | × | 40     |         | ●       |
| 6       | × | 50     | × | 50     |         | ●       |
| 6       | × | 60     | × | 60     |         | ●       |
| 6       | × | 65     | × | 65     |         | ●       |
| 9       | × | 50     | × | 50     |         | ●       |
| 9       | × | 75     | × | 75     |         | ●       |




※中にはメーカーが限られる商品もあります

### フォーミングアングル (SUS304, 430)

● : 2B肌 ○ : CG(コイルラインダ-研磨)肌 ④ : 外2面#400

単位 : mm

| サイズ     |   |        |   | 304    |         | 430     |         |
|---------|---|--------|---|--------|---------|---------|---------|
| 肉厚<br>t | × | 辺<br>A | × | 辺<br>B | 4,000mm | 6,000mm | 4,000mm |
|         |   |        |   |        | 2       | ×       | 20      |
| 2       | × | 25     | × | 25     | ●       |         | ●       |
| 2       | × | 30     | × | 30     | ●       | ④       | ● ④     |
| 2       | × | 40     | × | 40     | ●       | ④       | ● ④     |
| 3       | × | 15     | × | 15     |         | ○       |         |
| 3       | × | 20     | × | 20     |         | ○ ④     |         |
| 3       | × | 25     | × | 25     |         | ○ ④     |         |
| 3       | × | 30     | × | 30     |         | ○ ④     |         |
| 3       | × | 40     | × | 40     |         | ○ ④     |         |
| 3       | × | 50     | × | 50     |         |         | ○       |
| 4       | × | 50     | × | 50     |         |         | ○       |
| 5       | × | 40     | × | 40     |         |         | ○       |
| 5       | × | 50     | × | 50     |         |         | ○       |
| 5       | × | 75     | × | 75     |         |         | ○       |
| 6       | × | 50     | × | 50     |         |         | ○       |
| 6       | × | 60     | × | 60     |         |         | ○       |
| 6       | × | 65     | × | 65     |         |         | ○       |
| 6       | × | 75     | × | 75     |         |         | ○       |

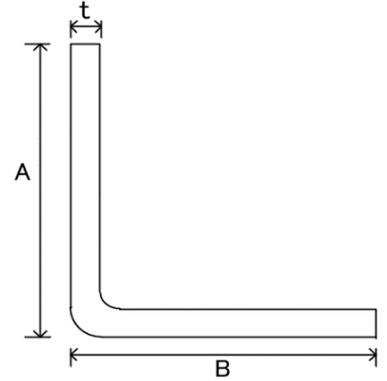

### SUS304 フォーミングアングル(スモール) (外2面HLSPV)

単位 : mm

※中にはメーカーが限られる商品もあります

| サイズ     |   |        |   | 304    |         |
|---------|---|--------|---|--------|---------|
| 肉厚<br>t | × | 辺<br>A | × | 辺<br>B | 4,000mm |
|         |   |        |   |        | 1.0     |
| 1.0     | × | 10     | × | 10     | ●       |
| 1.0     | × | 12     | × | 12     | ●       |
| 1.0     | × | 13     | × | 13     | ●       |
| 1.0     | × | 16     | × | 16     | ●       |
| 1.0     | × | 19     | × | 19     | ●       |
| 1.2     | × | 19     | × | 19     | ●       |

| サイズ     |   |        |   | 304    |         |
|---------|---|--------|---|--------|---------|
| 肉厚<br>t | × | 辺<br>A | × | 辺<br>B | 4,000mm |
|         |   |        |   |        | 1.0     |
| 1.2     | × | 25     | × | 25     | ●       |
| 1.2     | × | 30     | × | 30     | ●       |
| 1.5     | × | 30     | × | 30     | ●       |
| 1.2     | × | 32     | × | 32     | ●       |
| 1.5     | × | 32     | × | 32     | ●       |